
DATE BY	REVISION
89/9.15	△1

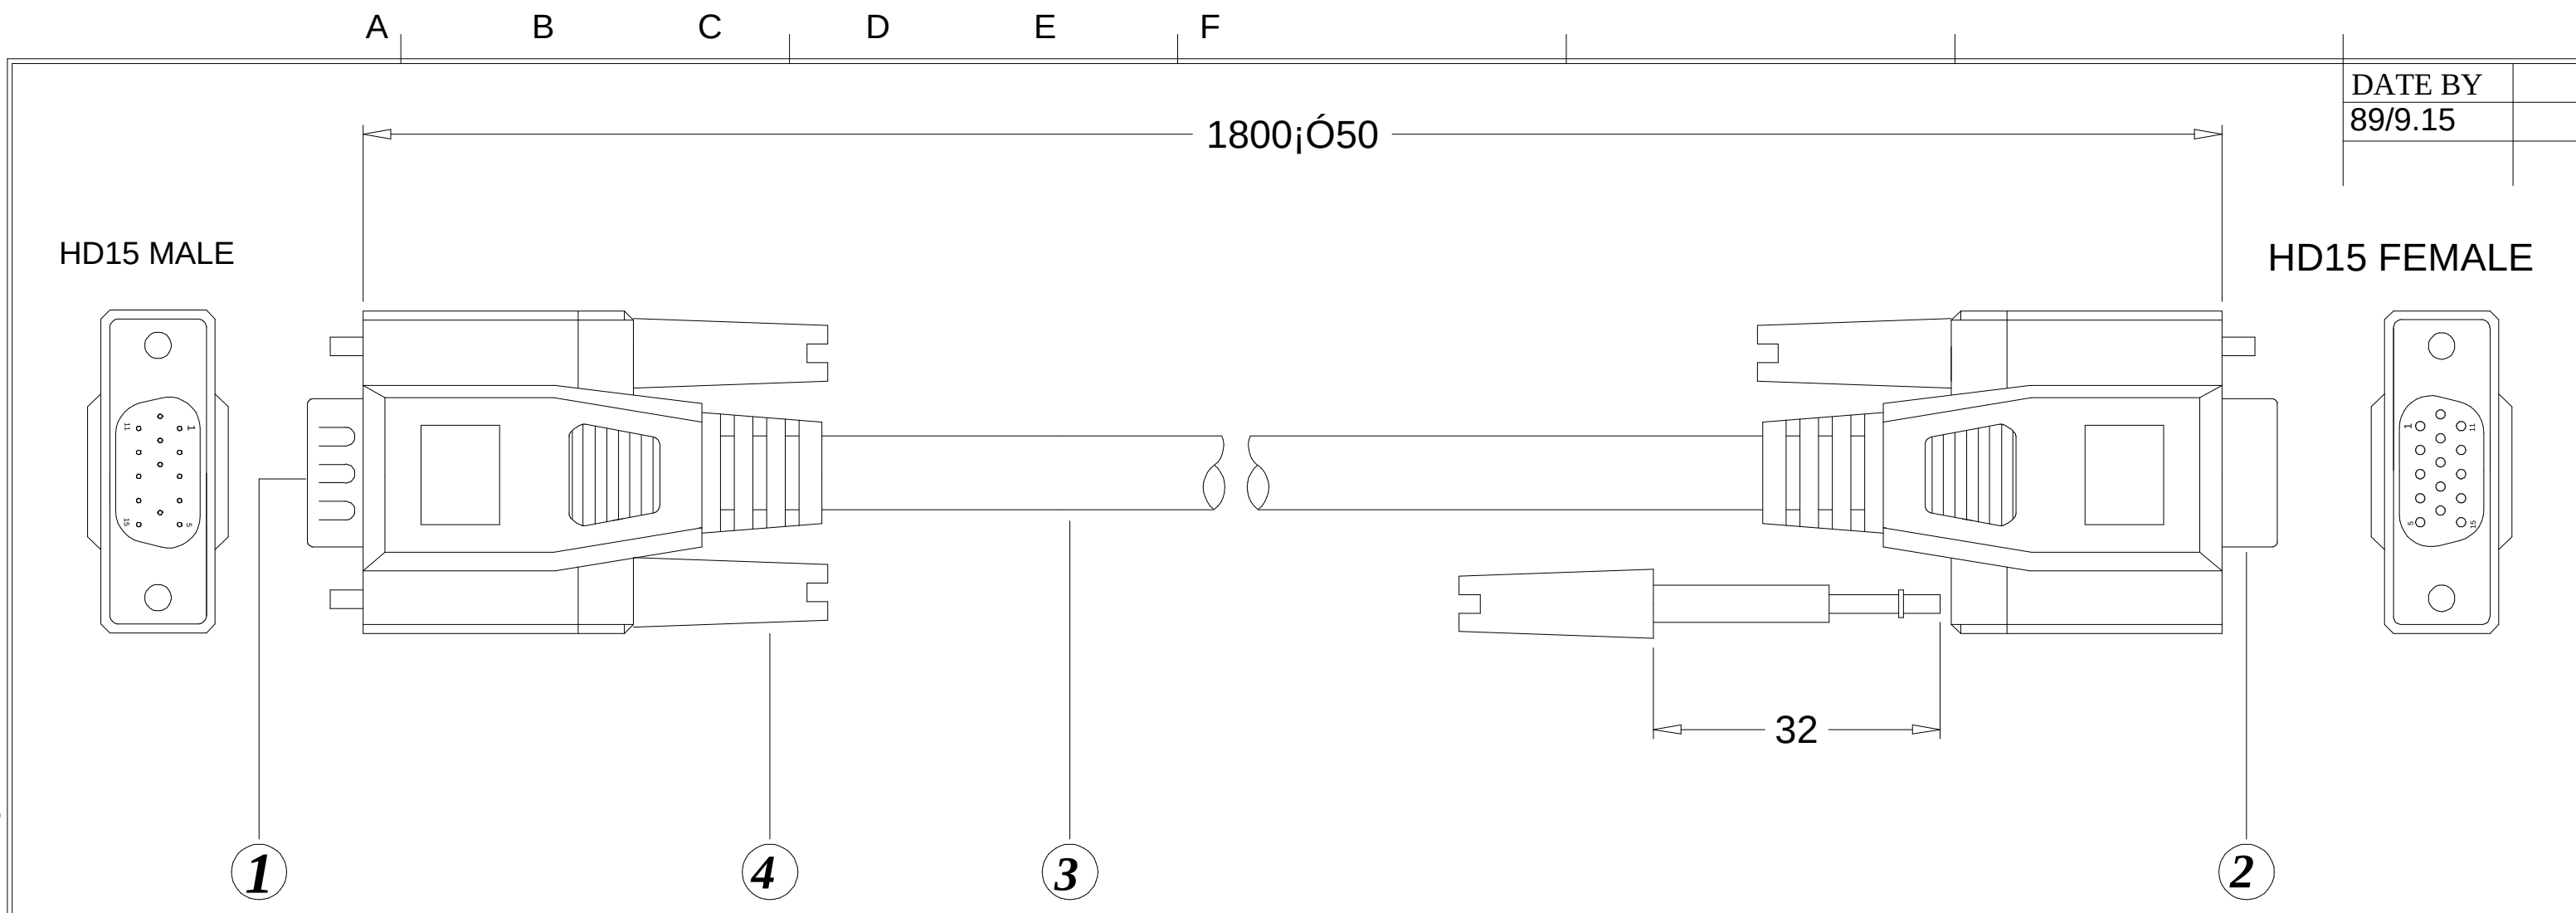

MAT'L:
1.CABLE:#28,UL2919,3COAX+4C+1+AL/MY+B,O.D:8.1
2.CONNECTOR:HD15M,9th EMPTY,BLACK
HD15F,BLACK
3.THUMBSCREW:#4-40UNC,E32
4.COPPER TAPE:30 X 50
5.BLACK HEAT SHRINK TUBE:Ø1.5x15:6PCS
Ø3x8:6PCS

NOTE:
1.TOTAL LENGTH:1800±50mm
2.COLOR:BEIGE
3.MOLDED TYPE
4.360° SOLDER

CONFIGURATION:

HD15M		HD15F
1	RED(COAX.)	1
6	RED(GROUND)	6
2	GREEN(COAX.)	2
7	GREEN(GROUND)	7
3	BLUE(COAX.)	3
8	BLUE(GROUND)	8
4	BROWN	4
5	BLACK	5
13	ORANGE	13
14	WHITE	14
SHIELD	(BRAID)	SHIELD

4	THUMBSCREW:#4-40UNC,E32	4
3	#28,UL2919,3COAX+4C+B,O.D:8.1,BEIGE	1.8M
2	HD15F,BLACK	1
1	HD15M,9th EMPTY,BLACK	1
NO.	***DESCRIPTION***	***QTY***

△1 *MODIFY:BUYER NO:CC401M1-37(AK3220 1.8M) AK3220 1.8M,
DESIGNATE INNER CORD COLOR(M00092) Y.C.C/89.9.15

DATE	19 JUN,1996	PARTS NO	MN3043N	TITLE:	HD15 MALE-HD15 FEMALE (MD TYPE) ***AK3220 1.8M***
UNIT	MM	DRAWN NO	001142		
SCALE		BUYER NO	002		

DRAWN	S.M. 6/19	CHECK		APPRO	

ASSMANN ELECTRONICS.INC